



TYPE L



TYPE SW

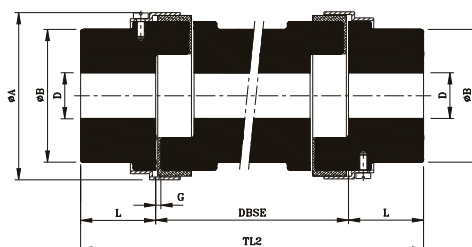

TYPE RRS

TECHNICAL DATA

Coupling		Power Rating						Pilot Drill Size	Max. Bore D	ØA		Length thru' Bore "L"	ØB	Gap G	ØE	DBSE	#Overall Length "TL2" for (SW/L)
		Synthetic Rubber		Polyurethane		Hytrel				SW/RRS	TL1						
Type	Size	Rated Torque (Nm)	kW@ 100 rpm	Rated Torque (Nm)	kW@ 100 rpm	Rated Torque (Nm)	kW@ 100 rpm										
L	35	0.38	0.004	0.6	0.01	1.0	0.01	-	10	-	16	6.5	16	1	-	-	21
	50	2.80	0.03	4.2	0.04	7.0	0.07	-	16	-	27	15	27	1	-	-	42
	70	4.90	0.05	7.4	0.08	12.3	0.13	-	20	-	35	19	35	2	-	-	51
	⊙ 75	9.80	0.1	14.7	0.15	24.5	0.26	-	22	-	45	21	45	2	-	-	55
	■ 75	9.80	0.1	14.7	0.15	24.5	0.26	-	22	-	45	21	39	2	-	-	55
L SW RRS	95	21.10	0.22	31.7	0.33	52.8	0.55	-	28	65	54	25	49	2	19	90,100,140	63
	99	46.40	0.49	69.6	0.73	116	1.2	-	30	78	65	27	51	2	27		72
	100	46.40	0.49	69.6	0.73	116	1.2	-	35	78	65	35	57	2	27	90	88
	110	89	0.93	133.5	1.4	222.5	2.3	-	42	96	85	43	76	3	35	100	108
	150	141	1.5	211.5	2.2	352.5	3.7	-	48	111	96	45	80	3	35	140	115
	190	190	2.0	285	3.0	475	5.0	-	60	129	115	54	102	3	45	180	133
	225	265	2.8	397.5	4.2	662.5	6.9	-	65	142	127	64	111	3	45		153
226	327	3.4	490.5	5.1	817.5	8.6	25	70	153	137	70	119	3	51		178	
L SW	276	532	5.6	798	8.4	1330	13.9	25	75	173	157	80	127	3	60	-	200
	280	782	8.2	1173	12.3	1955	20.5	30	80	208	192	80	140	3	70	-	200
	295	1279	13.4	1918.5	20.1	3197.5	33.5	30	95	253	237	95	162	3	80	-	238
	2955	2132	22.3	3198	33.5	5330	55.8	30	105	253	237	108	180	3	80	-	264
SW	300	3047	31.9	4570.5	47.9	7617.5	79.8	30	105	272	-	115	180	3	-	-	283
	350	4308	45.1	6462	67.7	10770	112.8	30	115	323	-	128	200	3	-	-	309

All dimensions are in mm.

For RRS/SW maintain gap 'G' at the time of assembly.

Maximum bores can be increased in case of steel hubs. Consult manufacturer

Material : Sintered iron for sizes 035 to 075

Aluminum for sizes 050 to 110 & for all RRS spacers.

Cast Iron for sizes 095 to 350.

■ 075 -- Aluminium

⊙ 075 -- Sintered Iron

FOR RRS, TL2=DBSE + 2L1

B.V. Transmission Industries

Unit 18 , Khyati Industrial Estate,
Laxmi Nagar, Link Road , Goregaon West,
Mumbai - 400104, Maharashtra , India

Tel : +91- 22-28762345

Tel : +91- 22-28767941

☎ : +91- 93247 18035

☎ : +91- 98206 92004

email :: sales@bvchains.com

bvchain@gmail.com

web:: www.bvchains.com

web:: www.jawcouplings.com